

FK11R-20T




FK11R-20T

Total Weight:	3000kg
Rated capacity:	2 ton
rated power:	31.2/2250kw/rpm

Customizable



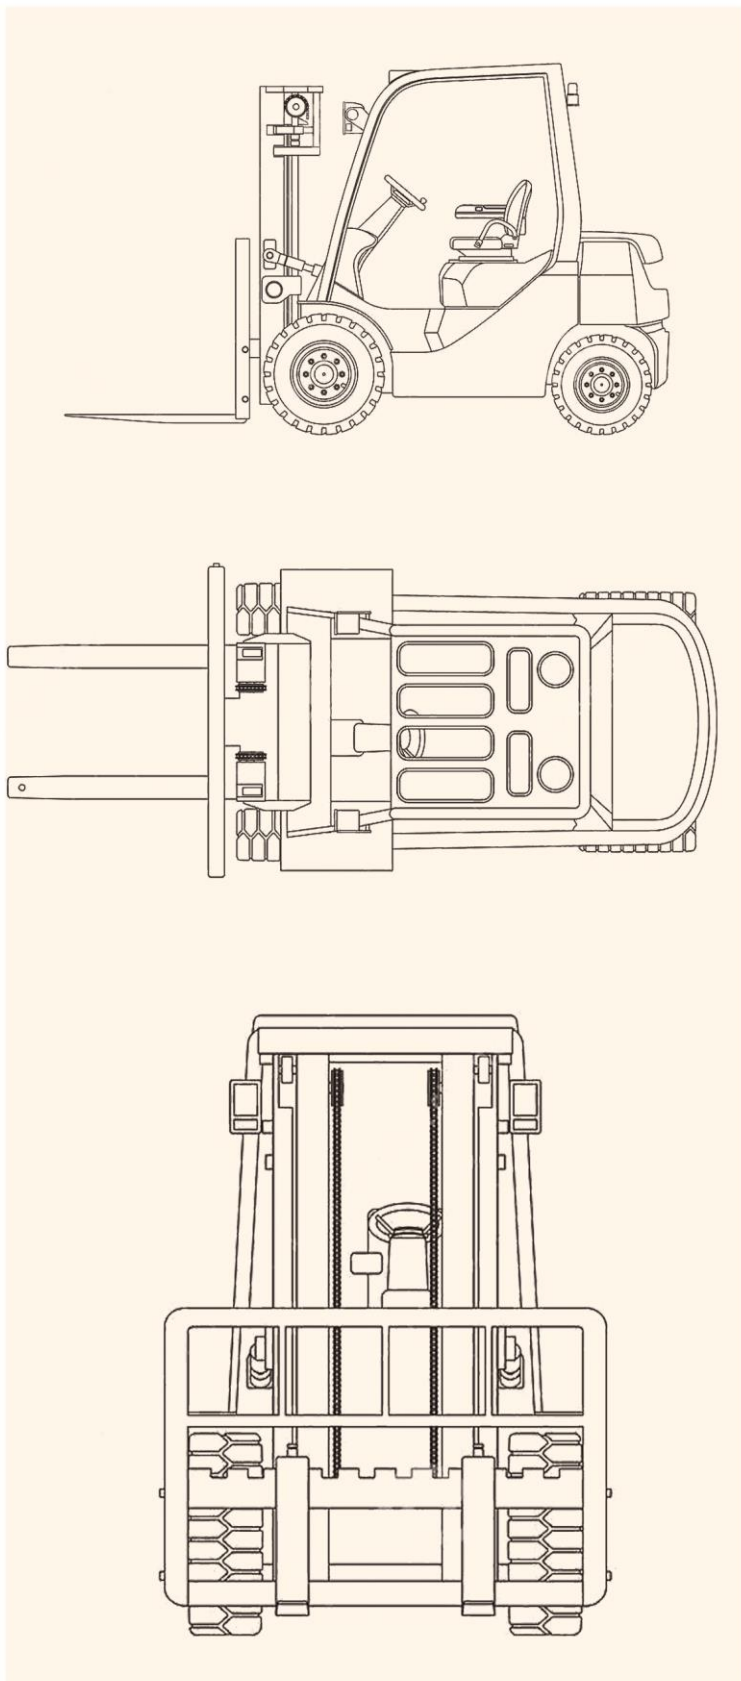

► Technical specifications

Basic parameters

Rated capacity:	2 ton
Total Weight:	3000 kg
Load center:	500

Performance parameter

Lift height:	3000
Free lift height:	150
Fork size(L*W*T):	1070×120×40
Fork outside spread(Min./Max.):	300/1200
Front overhang:	482
Mast lowered height:	2095
Mast extended height:	4050
Overhead guard height:	2120

Job parameters

Turning radius:	2320
Min. right angle aisle width:	1910
Travel speed (unload/full load):	20/18.5
Lift speed (unload/ full load):	510/450
Max. gradeability:	20
Front wheel:	7.00-12-12PR
Rear wheel:	6.00-9-10PR

Length to face of fork

Without of fork:	2480
With fork:	3550
Wheel width:	1150

Other parameters

Wheel base:	1650
Engine Rated output:	31.2/2250
Engine Rated torque:	143.7/1800
Engine Displacemen:	2065
Engine No. of cylinder:	4
Engine Bore×stroke:	89*83
Shift (FWD/RVS):	1/1
Operating pressure:	17.5
Transmission Model:	Hydraulic

安徽福客重工有限公司
Anhui Fuke Heavy Industry Co., Ltd.

website: <https://construction-equip.com>

whatsapp: +8613505697380

Address: Room 405, Building B-4, East Side
of Dazhong Road, Cuozen Town, Feidong
County, Hefei City, Anhui Province