

FK FUKU 福客®

FK18-9

**Boutique Manufacturing
Conquer the word with Quality**




FK18-9

Total Weight: 1700 kg

Standard bucket capacity: 0.05 m³

Rated power: 13.3/2200 kW/rpm

- New generation product
- Exquisite
- Reliable structure
- Excellent performance
- Small and efficient
- Convenient maintenance
- Cost-effective

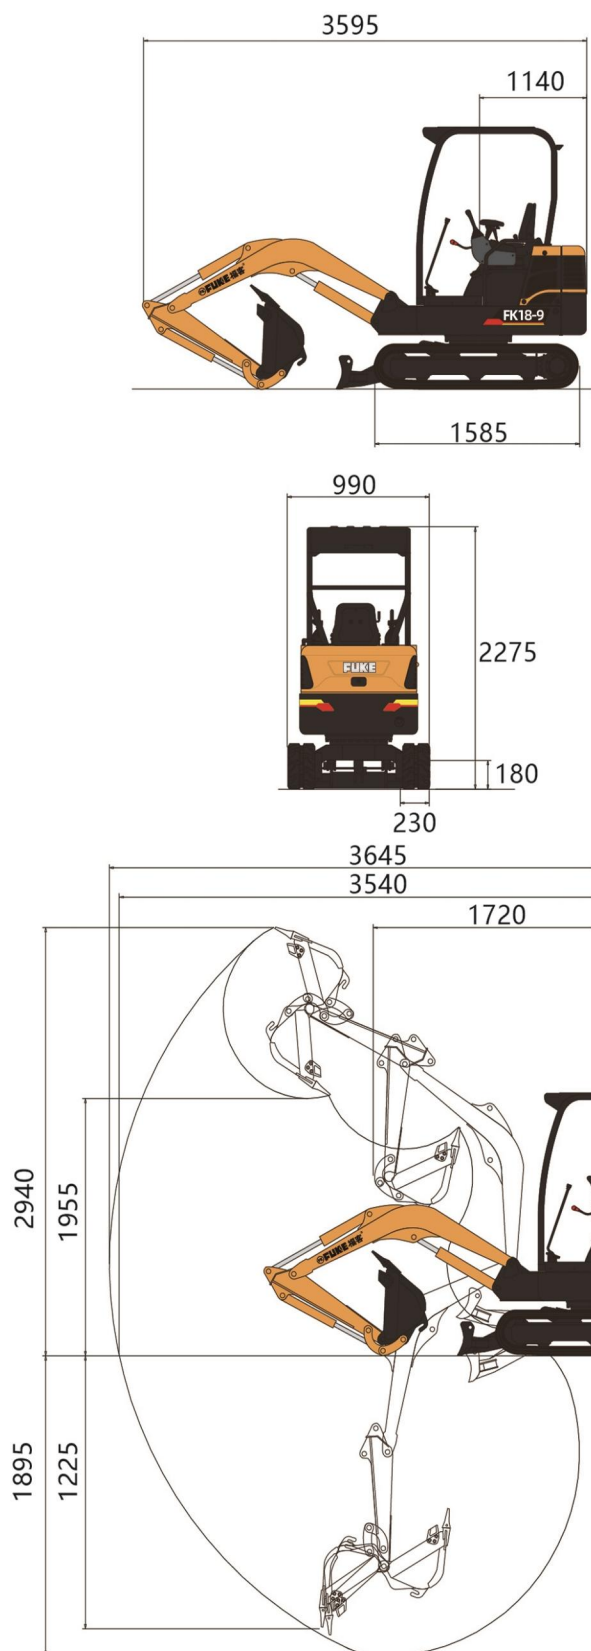

► Technical specifications

Basic parameters

Total Weight	1700 kg
Standard bucket capacity	0.05 m ³

Performance parameter

Engine	Yanmar
Engine rated power	13.3/2200 kW/rpm
Gradeability	30 °
Maximum digging force of stick	8 kN
Bucket excavation	12.5 kN
Driving speed	2.2 km/h
Platform rotation speed	9-11 rpm

Job parameters

Maximum digging height	2940 mm
Maximum digging depth	1895 mm
Maximum digging radius	3645 mm
Maximum ground excavation radius	3540 mm
Maximum unloading height	1955 mm
Minimum radius of gyration	1720 mm
Maximum vertical digging depth	1225 mm

Transport size

Overall length (transport state)	3595 mm
Overall width (transport state)	990 mm
Overall height (transport state)	2275 mm

Other parameters

Track width	990 mm
Track length	1585 mm
Track shoe width	230 mm
Minimum ground clearance	180 mm
Balance weight off the ground	460 mm
Radius of tail gyration	1140 mm
Fuel tank capacity	20 L
Hydraulic oil tank capacity	22 L

安徽福客重工设备有限公司
Anhui Fuke Heavy Industry Equipment Co., Ltd.

Contact us:

Phone/Whatsapp: +8613505697380

Email: fk002@fukebn.com/fuke7380@gmail.com

www.fukeonline.com



*We follows the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.