

FK FUKU 福客®

FK-216D



Basic Information

Operating weight
16000kg


Rolling width
2130mm

Gradeability
30%

Activating force
305/165KN


Rated power
118KW

Rated rotary speed
2000r/min

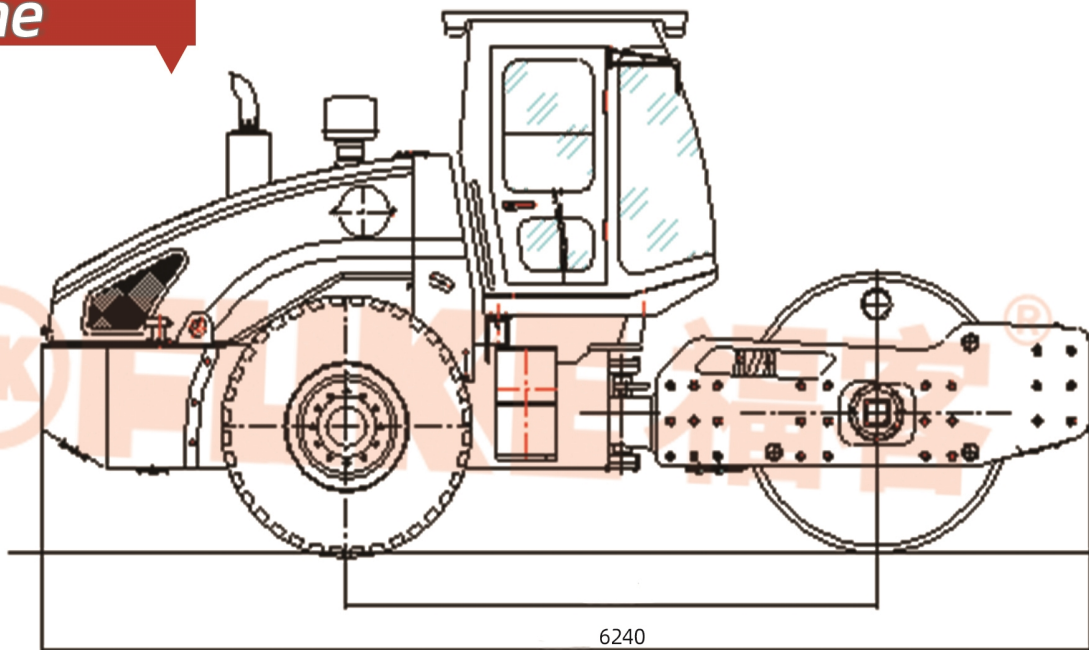

Technical Specification

Model	FFK616
Operating weight	16000 kg
Diameter of vibrating drum	φ1550 mm
Rolling width	2130 mm
Activating force	305/165 KN
Vibration frequency	30 Hz
Theoretical amplitude of vibration	1.8/0.9 mm
Moving speed Range I II III	2.5/5.0/10.5 km/h
backward I II	2.5/5.0 km/h
Gradeability	30%
Fuel tank	300 L
Hydraulic tank	130 L
Diesel engine model	WP6G160E201
Rated rotation speed	2000 r/min
Rated power	118 kw
Overall dimensions L W H	6240×2280×3080 mm

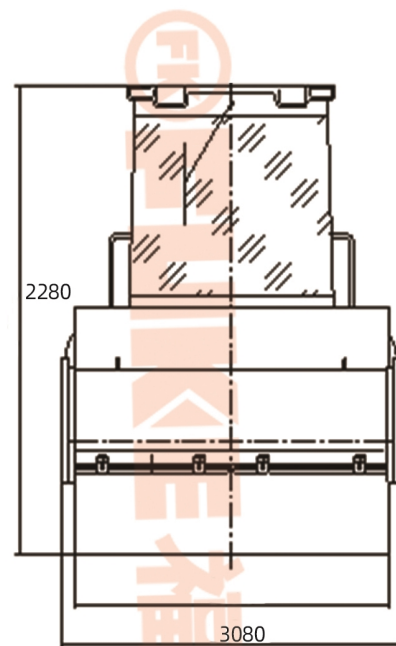

★Mechanical drive, three-speed gear shift. Hydraulic vibration, start-vibration by electric control, hydraulic steering with light operation.

★Adopt the special gear-box with synchronizer, easy to operate and comfortable.

★Streamlined shape design with the whole removable cover, easy to maintenance.

*We follows the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.



Contact us:

Phone/Whatsapp:+8613505697380

Email:fk002@fukebn.com/fuke7380@gmail.com