



Basic Information

Operating weight

15000kg

Rolling width

2130mm

Gradeability

30%

Exciting force


275/140kN

Rated power

162KW


Rated rotary speed

2200r/min

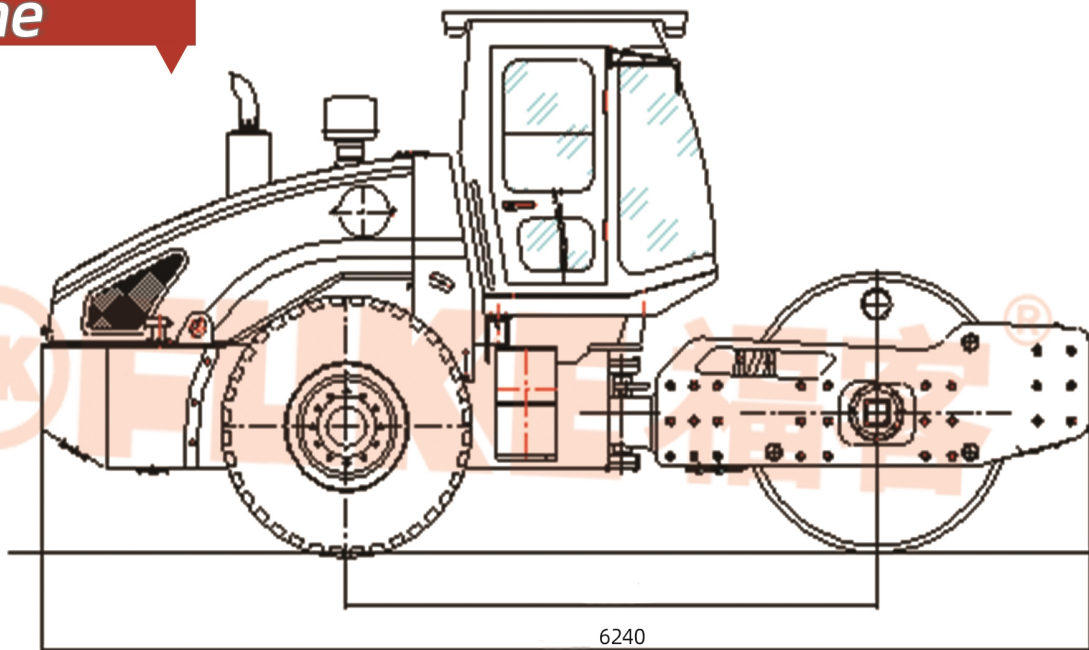

Technical Specification

Model	FFK615HP
Operating weight	15000 kg
Diameter of vibrating drum	φ1500 mm
Rolling width	2130 mm
Activating force	275/140 KN
Vibration frequency	30 Hz
Theoretical amplitude of vibration	1.8/0.9 mm
Moving speed Range I II III	2.5/5.0/10.5 km/h
backward I II	2.5/5.0 km/h
Gradeability	30%
Diesel engine model	QSC8.3-C220
Rated rotation speed	2200 r/min
Rated power	162 kw
Overall dimensions L W H	6240×2280× 3050 mm

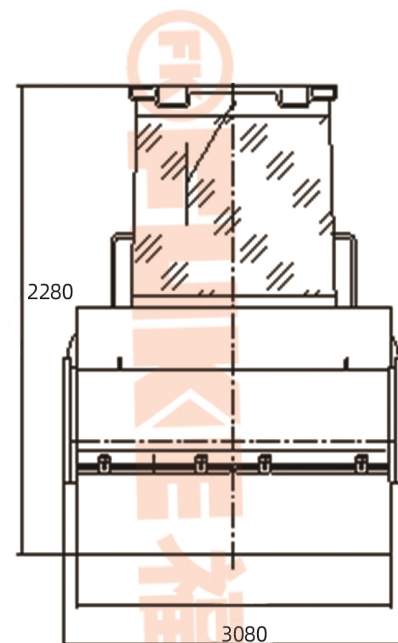

★Mechanical drive, three-speed gear shift. Hydraulic vibration, start-vibration by electric control, hydraulic steering with light operation.

★Articulated frame, flexible steering, nice appearance and streamlined design. The back casing can be turned up in a big angle for easily maintenance.

★Adopt the special gear-box with synchronizer, easy to operate and comfortable.

★Streamlined shape design with the whole removable cover, easy to maintenance.

*We follows the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.



Contact us:

Phone/Whatsapp: +8613505697380

Email: fuk002@fukebn.com/fuke7380@gmail.com