

征服世界
领跑未来



Basic Information

Operating weight

27.2T

Dozing capacity

10m³

Blade width

4130mm

Max. torque

1400N.m

Rated power

257KW

Track gauge

2140mm








Technical Specification

Model	FK14-320T
Engine model	CUMMINS NTA855-C360S10
Displacement (L)	14.01
Rated power (kw/rpm)	257/2000
Max.torque (N.m/rpm)	1400/1440
Operating weight	37.2 Ton
Dimension(no ripper)(mm)	6880×4130×3688
Grounding length (mm)	3150
Ground pressure(MPa)	0.105
Track gauge (mm)	2140
Dozing capacity(m³)	10
Blade width (mm)	4130
Blade height(mm)	1590
Max drop below ground (mm)	560/630
Track shoe width (mm)	560
Pitch (mm)	228.6
Quantity of track link	41
Quantity of Carrier rollers	4
Quantity of Track rollers	14
Max pressure (MPa)	14
Discharge (L/min)	355
Max tractor force (KN)	280
Forward Speed (Km/h)	F1:0-3.6 F2:0-6.6 F3:0-11.5
Rear Speed (Km/h)	R1:0-4.4 R2:0-7.8 R3:0-13.5
Product Features	Excellent efficiency Booster Car air conditioner Protective Device GPS positioning On-board repair tools Fire extinguisher Comfortable operation



Outline

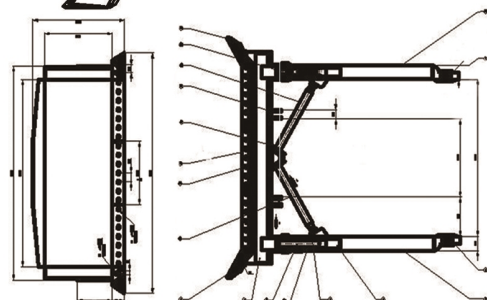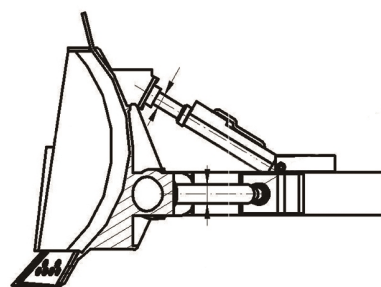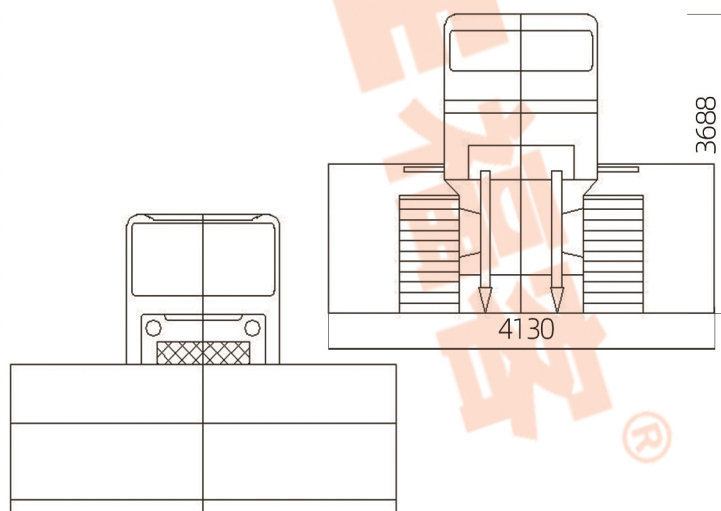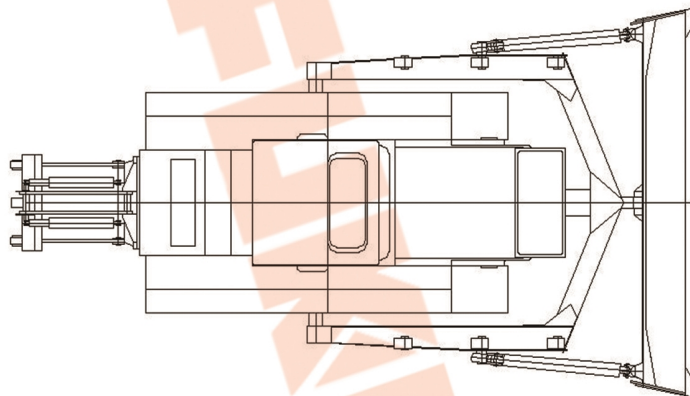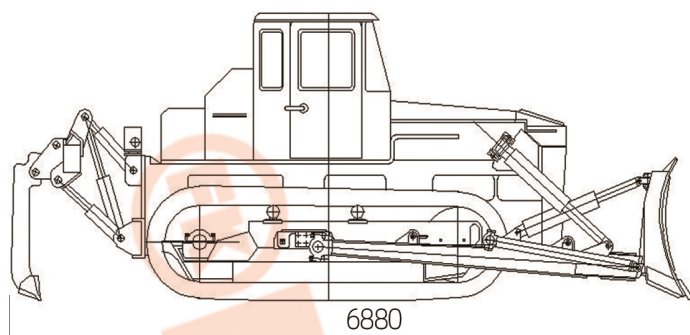

Contact us:

Phone/Whatsapp:+8613505697380

Email:fk002@fukebn.com/hesun525@gmail.com

安徽福客重工有限公司

Anhui Fuke Heavy Industry Equipment Co., Ltd.