



Basic information

Model

FK-303T

Lift height:

6800mm

Tyre:

16/70-20

Weight unload:

7250kg

Front track:

1750mm

Wheel base:


2850mm



Detailed data

► data

Maximum lift capacity:	3000kg
Lift capacity to full height:	2300kg
Lift capacity at full reach:	1100kg
Lift height:	6800mm
Reach at maximum lift height:	450mm
Maximum forward reach:	3600mm
Weight unload:	7250kg
Tyre:	16/70-20
Outside turn radius(over tyre):	4250mm
Carriage roll back angle(degrees):	42.6
Carriage dump angle(degrees):	37.5
Overall height:	2300mm
Overall width(over tyres):	2150mm
Inside width of cab:	800mm
Front track :	1750mm
Wheel base:	2850mm
Overall length to front tyres:	4200mm
Overall length to front carriage:	4650mm
Ground clearance:	350mm
Engine rate power:	76KW
Pallet fork length:	1220mm
Package(1*20GP):	1 unit

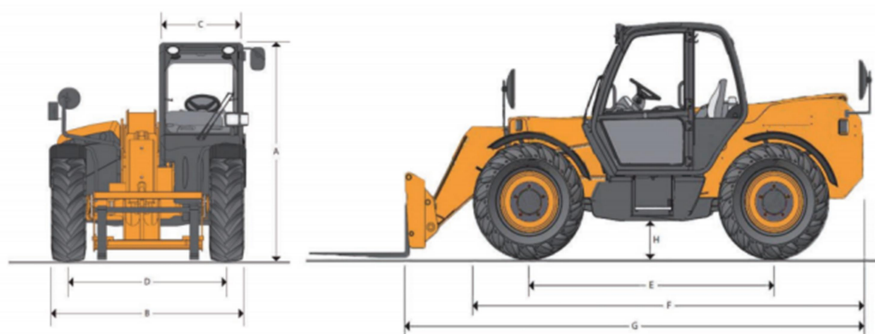

Specification

A	Overall height	2300 mm	Outside turn radius (over tyres)	4250 mm
B	Overall width(over tyres)*	2150 mm	Carriage roll back angle	degrees 42.6
C	Inside width of cab	800 mm	Carriage dump angle	degrees 37.5
D	Front track	1750 mm	Weight unladen	7250Kgs
E	Wheelbase	2850 mm	Tyres	16/70-20
F	Overall length to front tyres	4200 mm	Fule tank	95L
G	Overall length to front carriage	4650 mm	Hydraulic oil tank	70L
H	Ground clearance	350 mm	Drive speed	23/Km

whatsapp: +8613505697380

Email: fuke7380@gmail.com